DELTA S



Roll-bag Converting



DELTA S - Standard bags

FOR **HIGH SPEED** PRODUCTION OF BOTTOM-/SIDE-/STAR-SEALED BAGS IN 1 OR 2 LANES IN THIN, MEDIUM AND HEAVY GAUGE FILM





DELTA S

The DELTA S can be configured for bottom-/side-/star-sealed bags on a roll in 1 or 2 lanes.

The DELTA S is available for in-line or out-of-line operation.

The DELTA sealing module can be equipped with one or two sealing stations (simplex or duplex) with sealing bars with one or two sealing lips depending on the type of bag and capacity requirements. A DELTA S Simplex can easily be upgraded to a DELTA S Duplex.


DELTA'S modular concept means that the DELTA S can be modified to manufacture other kinds of bags with additional modules in the DELTA program.

Automatic down stream roll handling/packing can also be integrated.


Technical data

Film thickness From 5 micron	Min. distance between seals 250 mm (9.8 inch)	Max. cycles/min 600 (1200 bags)
Max. sealing width 900 mm (35.4 inch)	Max. distance between seals Unlimited	Max. speed 180 m/min (600 feet/min)

Additional equipment: Print registration, all types of folding equipment (before and after sealing), cored rolls, hot-melt, twist-tie, PP-string, tape and labelling.

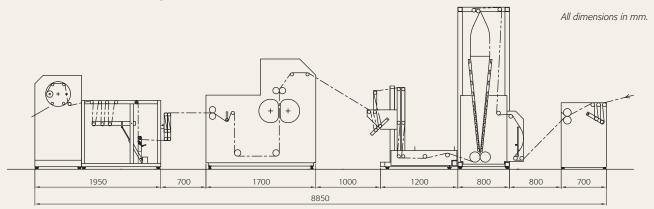

DELTA S Simplex in-line.

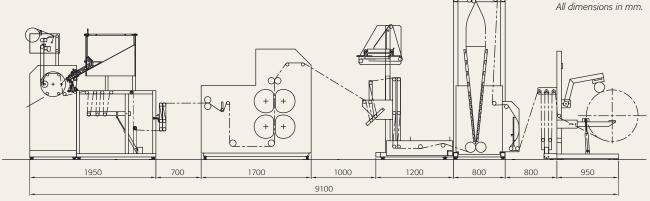

DELTA S Duplex out-of-line.

At Roll-o-Matic we always focus on our customers and their production demands – therefore all development at Roll-o-Matic is customer driven and customer orientated. The DELTA S line

has been developed according to our customers' requirements for user friendly, easy to operate, high capacity equipment where the key parameters are: a modest investment, stability, outstanding performance and Return on Investment.



Roll-o-Matic A/S

Petersmindevej 23 · 5000 Odense C · Denmark · Phone +45 6611 1618 · Fax +45 6614 3278 rom@roll-o-matic.com · www.roll-o-matic.com